


CWTMini50HF

Double screened 0.5m
BNC output cable


Thin, screened
coil for high dV/dt immunity 100mm long,
3.5mm thick, 2kV peak

**High Frequency
(-3dB) 50MHz
Rise-time 12.5ns**

**Introducing the NEW CWTMini50HF,
an extension of the CWTMiniHF
range for even faster transient
current measurement**

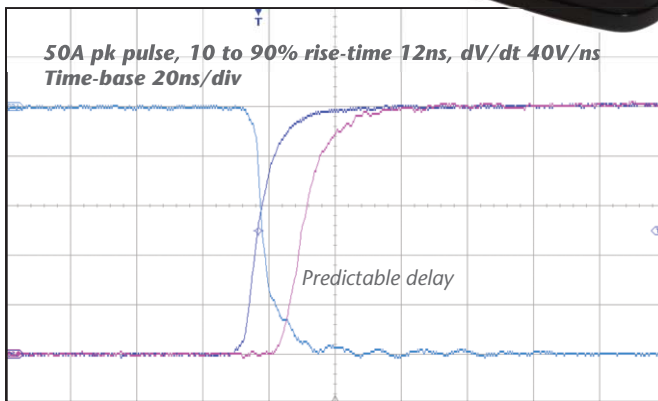

Ch1 - (2GHz) Co-axial shunt (10A/div)
Ch2 - CWTMini50HF/3/B/1/100/2 - 10mV/A, peak current 600A (10A/div)
Ch3 - Voltage close to the coil - 100V/div

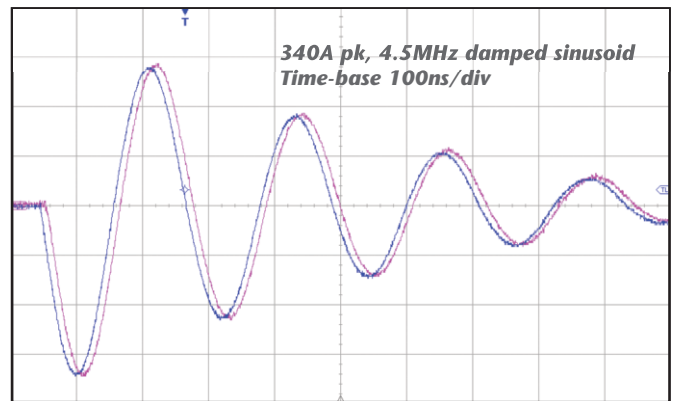

Ch1 - (2GHz) Co-axial shunt (100A/div)
Ch2 - CWTMini50HF/3/B/1/100/2 - 10mV/A, peak current 600A (100A/div)

Model	Sensitivity (mV/A)	Peak current (kA)	Noise max (mVp-p)	Drop (%)	LF (-3dB) bandwidth (Hz)	Peak di/dt (A/ns)	HF (-3dB) bandwidth (MHz) 100mm
CWTMini50HF/015	200	0.03	20	85	150	2.0	50
CWTMini50HF/03	100	0.06	18	78	100	4.0	50
CWTMini50HF/06	50	0.12	12	70	75	8.0	50
CWTMini50HF/1	20	0.3	9.0	53	50	20	50
CWTMini50HF/3	10	0.6	15	11	12	40	50
CWTMini50HF/6	5.0	1.2	15	5.5	6.0	80	50
CWTMini50HF/15	2.0	3.0	12	2.8	3.0	80	50

Generating the part code

E.g. CWTMini50HF 3 / R / 1 / 100 / 2

a CWTMini50HF, Peak current 600A, Rechargeable battery, 1m cable, 100mm circumference coil, 2kV peak coil, 3.5mm thick. All units are supplied with, battery, calibration certificate, hard carry case.

If you have any queries regarding the CWT or require specifications outside our standard ranges please contact us.

www.powertekuk.com

April 2019

For UK & European sales, support, service and deliveries:

Powertek UK 19 Cornwallis Rd. Bilton, Rugby CV22 7HL New Tel: 01788 519911 Fax: 0870 0940135
Int'l Tel: +44 1788 519911 Int'l Fax: +44 870 0940135
E-mail: info@powertekuk.com www.powertekuk.com

For USA sales, support, service and deliveries: Powertek US Inc. 7

Third St. Holbrook, NY 11741 USA
Tel: +1 (631) 615-6279 Fax: +1 973 273 5893
E-mail: info@powertekus.com www.powertekus.com

